

## TIME ec Line

When time is essential



# TIME ec Line


When time is essential

## Delivery time is cut without compromising on product quality!




Systemair introduces TIME ec Line. Thanks to a new optimized production line and innovative thinking, it is now possible to reach a delivery time of less than three working weeks. This means more flexibility and time saved for everyone.

- Short delivery time – less than three working weeks.
- With rotary heat exchanger, ec-motor, hot water coil, and integrated control system.
- Choose from six sizes with air volumes from 750–11.400 m<sup>3</sup>/h.
- For indoor installation.

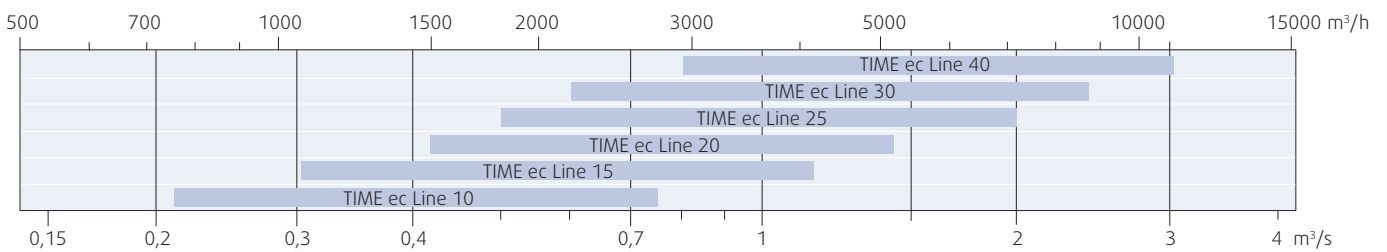

Airflow for TIME ec Line with external pressure of 250 Pa and max SFP 2.1 kW/(m<sup>3</sup>/s).

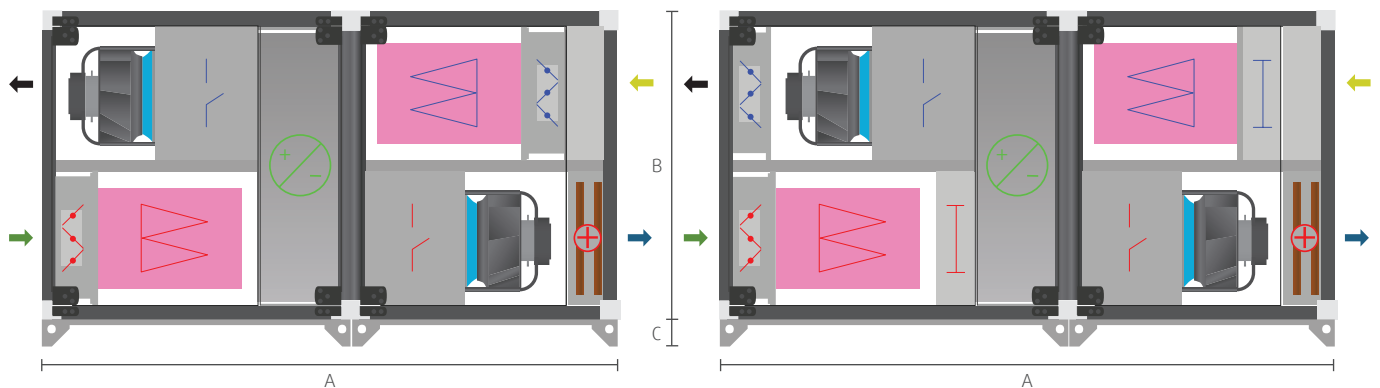

TIME ec Line Damper in extract	10	15	20	25	30	40
A: Length	2090	2090	2090	2090	2090	2090
B: Height	970	1120	1270	1420	1570	1720
C: Height of feet	100	100	100	100	100	100
Width	970	1120	1270	1420	1570	1720
Weight	440	460	590	665	730	970

TIME ec Line Damper in exhaust	10	15	20	25	30	40
A: Length	2240	2240	2240	2240	2240	2240
B: Height	970	1120	1270	1420	1570	1720
C: Height of feet	100	100	100	100	100	100
Width	970	1120	1270	1420	1570	1720
Weight	448	470	600	675	745	985

The above-mentioned weights and dimensions are a combination of rotary heat exchanger and water coil. Weights and dimensions of other combinations must be calculated in SystemairCAD. Supplied in 2 sections. Note supply and extract dampers and hot water coils are additional options.